

SPECIFICATIONS

- › USE A DIGITAL CODE OR A KEY
- › PROGRAM UP TO 10 USER CODES 4-6 DIGITS IN LENGTH
- › VOLUME CONTROL
- › AUTO LOCK OPTION
- › SINGLE ENTRY USER CODE OPTION
- › VACATION MODE
- › LOW BATTERY INDICATOR
- › UNIVERSAL 6 IN 1 LATCH: DRIVE-IN, SQUARE AND RADIUS CORNER
- › STANDARD BORE HOLE SIZES: 2-1/8" (54 mm) OR 1-1/2" (38 mm)
- › ADJUSTABLE BACKSET: 2-3/8" (60 mm) - 2-3/4" (70 mm)
- › STANDARD DOOR THICKNESS: 1-3/8" (35 mm) TO 2" (51 mm)
- › FULLY REVERSIBLE
- › OPERATES ON 4X AA BATTERIES (SOLD SEPARATELY) NO HARDWIRING REQUIRED
- › FULLY OPERATIONAL WITH CONVENTIONAL KEY (2 INCLUDED)
- › PACKAGED IN KEYED DIFFERENT (KD)
- › FULL KEYING SERVICE AVAILABLE
- › KEYWAY IS 6-PIN WR5 CYLINDER- COMES KEYED TO 5-PIN STANDARD
- › 6-PIN SC4 CYLINDER KEYED TO 5-PIN OPTION AVAILABLE
- › OPERATION TEMPERATURE -35C TO 66C (-31F TO 150.8 F)
- › LIFETIME MECHANICAL AND 5 YEAR FINISH WARRANTY
- › 1 YEAR ELECTRICAL COMPONENTS WARRANTY



EXTERIOR VIEW



INTERIOR VIEW

GRADE
2

ANSI
COMPLIANT



20 MINUTE
FIRE RATED
WITH MORTISE
FACEPLATE




FULL KEYING
SERVICES AVAILABLE
6-PIN WR5 KEYED
DIFFERENT TO 5-PIN



CUL LISTED



MEETS ADA
STANDARDS

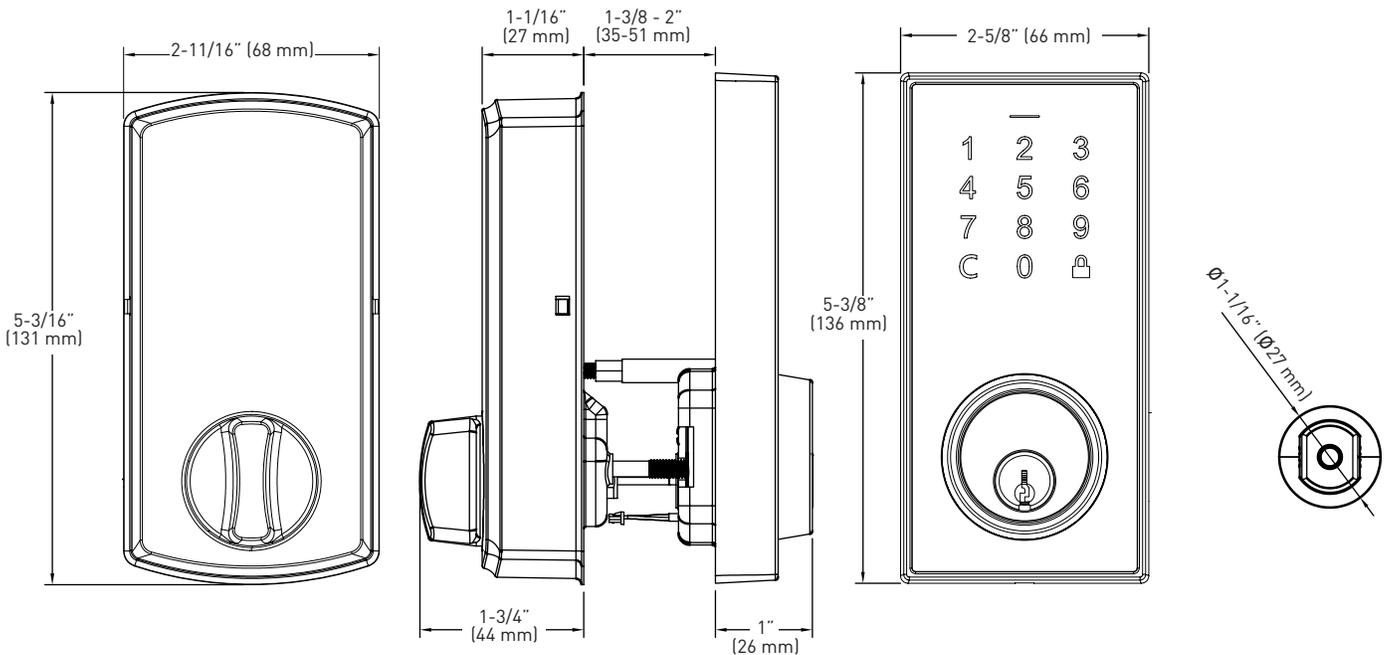

CENTINEL 3 DIGITAL DEADBOLT

BUILDER PACK

SATIN NICKEL 15	33-D5030SN
MATTE BLACK 19	33-D5030BLK
POLISHED CHROME 26	33-D5030PC

CASE QTY. 6



TAYMOR RECOMMENDED INSTALLATION HEIGHTS

CONSULT WITH THE AUTHORITY HAVING JURISDICTION FOR COMPLETE CODE REQUIREMENTS

