


## FEATURES

- › SINGLE LEVER WITH HOT & COLD INDICATOR INSERT
- › 4" CENTER-SET MOUNT
- › CERAMIC CARTRIDGE
- › POP-UP DRAIN ASSEMBLY INCLUDED
- › MAXIMUM FLOW RATE: 1.5 GPM/5.7 LPM @ 60 PSI
- › SOLID BRASS & COPPER WATERWAYS
- › FACTORY PRESSURE TESTED

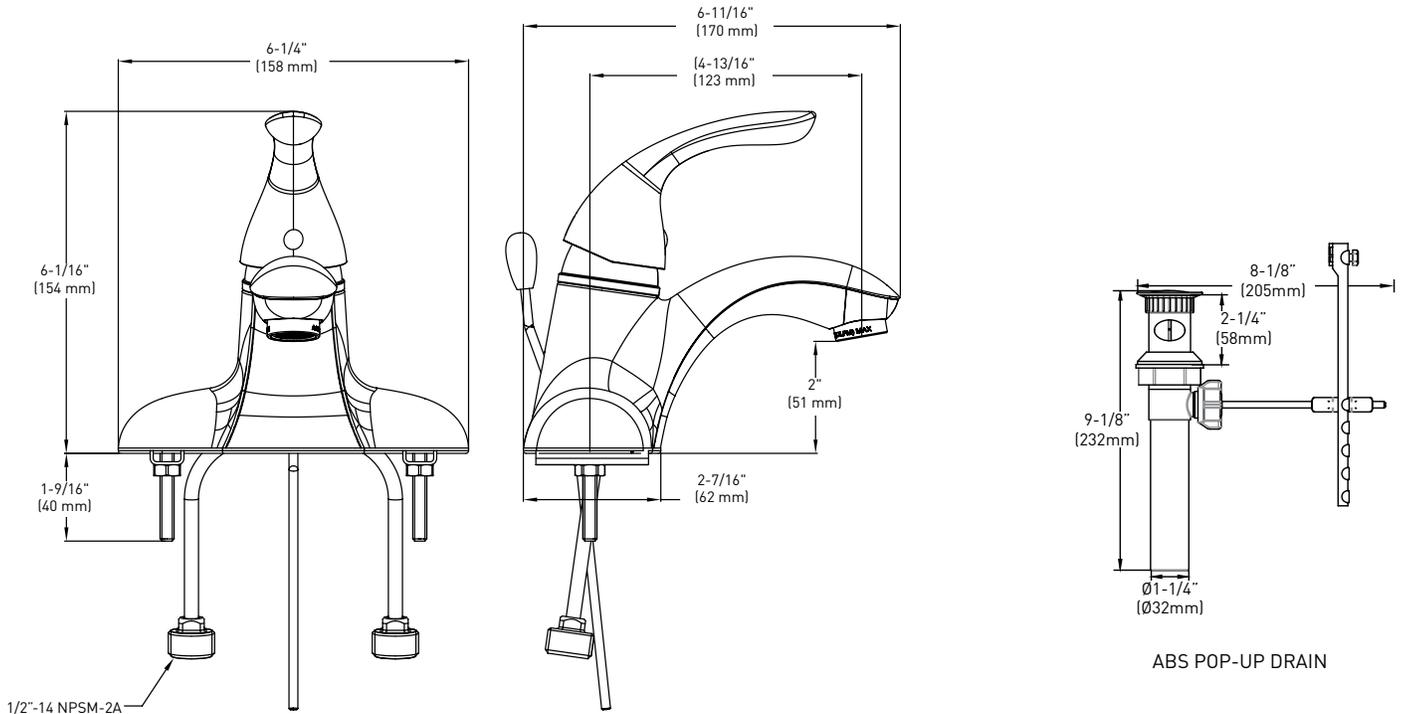

ABS POP-UP DRAIN

### MEASUREMENTS SUBJECT TO A 3% VARIANCE

MEASUREMENTS ARE FOR REFERENCE ONLY. TAYMOR RESERVES THE RIGHT TO CHANGE THE PRODUCT SPECS WITHOUT NOTICE. FOR PRODUCT WARRANTY, PLEASE VISIT TAYMOR WEBSITE FOR DETAILS

## CONSTRUCTION

- › METAL CONSTRUCTION
- › BRASS VALVE BODY

## MOUNTING

- › DESIGNED TO INSTALL THROUGH 3 HOLES, 13/16" [21mm] MIN. DIA. ON DECKS UP TO 1" [26mm]
- › DESIGNED TO INSTALL MIN. 1-13/16" [46mm] FROM VALVE CENTERLINE TO BACK SPLASH

## INLET

- › 1/2" Copper/MIP WITH 1/2"-14 NPSM AD APTERS

## OPERATION

- › PIVOT ACTION LEVER STYLE HANDLE
- › OPERATES WITH LESS THAN 5 LBS. OF FORCE

## WATER-CONTROL MECHANISM

- › CARTRIDGE
- › ONE-PIECE, SELF-CONTAINED CERAMIC DISC VALVE

## FLOW

- › AERATOR LIMITS MAXIMUM FLOW RATE TO 1.5 GPM MAX. (5.7 L/MIN.) @ 60 PSI

## CODES/STANDARDS APPLICABLE

- › cUPC
- › ASME A112.18.1/CSA B125.1
- › ANSI/NSF 372 AND 61/9

## GUARANTEE

- › LIFETIME GUARANTEE AGAINST DEFECTS IN MATERIAL AND WORKMANSHIP TO ORIGINAL CONSUMER PURCHASER
- › 5 YEAR WARRANTY IF USED IN INDUSTRIAL, COMMERCIAL AND BUSINESS INSTALLATIONS



DESCRIPTION	POLISHED CHROME	CASE QTY.
SINGLE LEVER BATHROOM FAUCET WITH HOT & COLD INDICATOR INSERT	06-4588P	6

