

## INFINITY

06-4486


LAUNDRY FAUCET



### SPECIFICATIONS

- › TWO LEVER HANDLES
- › SWING SPOUT WITH 180-DEGREE ROTATION
- › THREADED SPOUT FOR HOSE HOOK-UP
- › WASHERLESS CARTRIDGE
- › 4" CENTER-SET INSTALLATION
- › MINIMUM FLOW RATE: 2.4 GPM/9 LPM @ 20 PSI
- › FACTORY PRESSURE TESTED
  
- › cUPC CERTIFIED

CRITICAL DIMENSIONS NOT TO SCALE

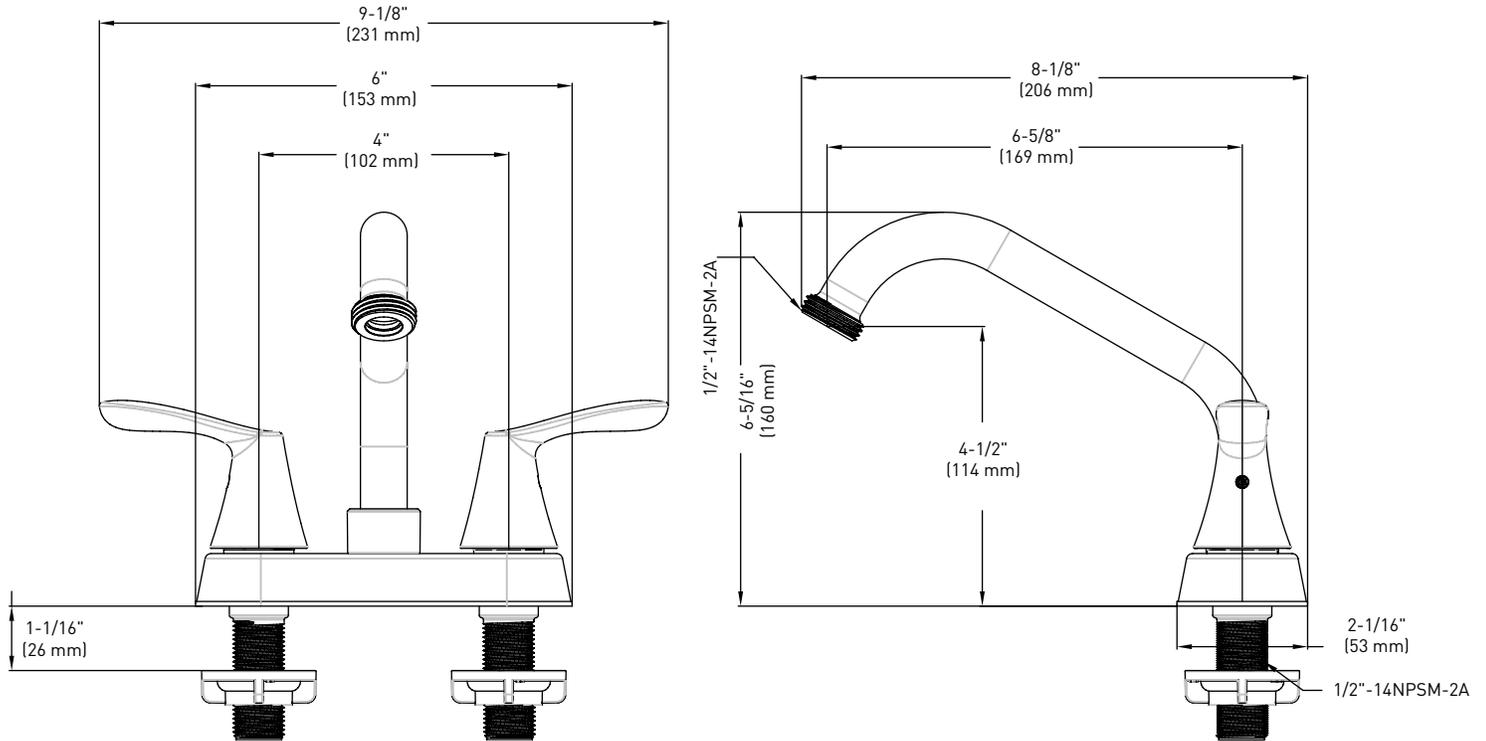

**CONSTRUCTION**

- › METAL CONSTRUCTION WITH POLISHED CHROME FINISH
- › PLASTIC VALVE BODY

**MOUNTING**

- › DESIGNED TO INSTALL THROUGH 3 HOLES, 7/8" (23 mm) MIN. DIA. WITH 4" (102 mm) CENTERS, ON DECKS UP TO 1" (25 mm)
- › DESIGNED TO INSTALL MIN. 1-11/16" (43 mm) FROM VALVE CENTERLINE TO BACK SPLASH

**INLET**

- › 1/2" -14 NPSM THREADED MALE INLET SHANKS

**OPERATION**

- › QUARTER-TURN LEVER STYLE HANDLES
- › OPERATES WITH LESS THAN 5 LBS. OF FORCE

**WATER-CONTROL MECHANISM**

- › WASHERLESS CARTRIDGE

**FLOW**

- › SPOUT DESIGNED TO DELIVER MINIMUM 2.4 GPM/9 LPM

**CODES/STANDARDS APPLICABLE**

- › cUPC
- › ASME A112.18.1/CSA B125.1
- › ANSI/NSF 61/9

**GUARANTEE**

- › LIMITED LIFETIME WARRANTY AGAINST DEFECTS IN MATERIAL AND WORKMANSHIP TO ORIGINAL CONSUMER PURCHASER
- › 5 YEAR WARRANTY IF USED IN INDUSTRIAL, COMMERCIAL AND BUSINESS INSTALLATIONS



DESCRIPTION	POLISHED CHROME	CASE QTY.
INFINITY TWO LEVER HANDLE LAUNDRY FAUCET	06-4486	6

