

Taymor

PRODUCT SPECIFICATIONS

BUILDERS SERIES ORLEANS LEVERSET

SPECIFICATIONS

- SOLID METAL CONSTRUCTION
- 4-IN-1 ADJUSTABLE LATCH FOR DRIVE-IN AND RADIUS MORTISE INSTALLATIONS WITH ADJUSTABLE BACKSET: 2-3/8" (60 mm) – 2-3/4" (70 mm)
- FITS STANDARD DOOR THICKNESS: 1-3/8" (35 mm) – 1-3/4" (45 mm)
- STANDARD BORE HOLES: 2-1/8" (54 mm)
- 1-3/4" x 2-1/4" FULL LIP CORNER RADIUS "D" STRIKE



GRADE
3

ANSI GRADE 3



LIFETIME MECHANICAL WARRANTY & 5 YEAR FINISH WARRANTY




FULL KEYING SERVICES AVAILABLE
KW1 5-PIN KEYWAY




20 MINUTE
OPTIONAL
FIRE RATING




REVERSIBLE

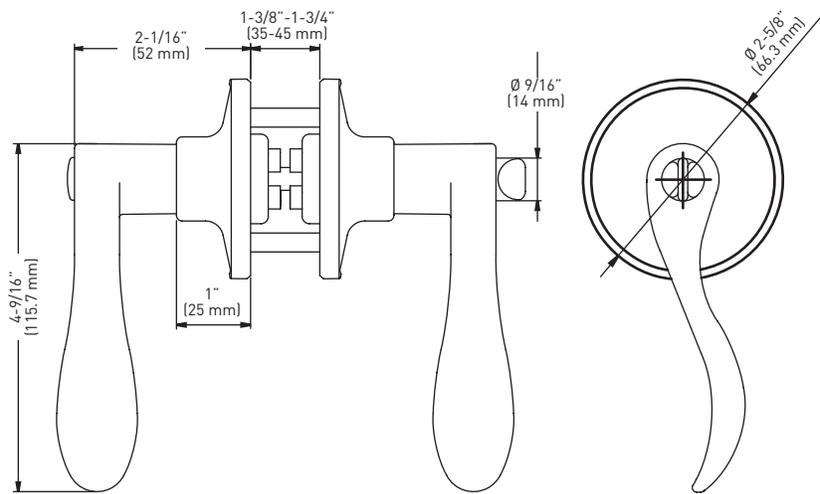


FULL LIP RADIUS STRIKE



4-IN-1 ENTRY LATCH



4-IN-1 PRIVACY/PASSAGE LATCH



MEASUREMENTS SUBJECT TO A 3% VARIANCE

MEASUREMENTS ARE FOR REFERENCE ONLY. TAYMOR RESERVES THE RIGHT TO CHANGE THE PRODUCT SPECS WITHOUT NOTICE. FOR PRODUCT WARRANTY, PLEASE VISIT TAYMOR WEBSITE FOR DETAILS.

*PLEASE SELECT "R" OR "L" FOR RIGHT OR LEFT HANDING AT END OF ITEM NUMBER WHEN ORDERING

BUILDER PACK	ENTRY - KD	PRIVACY	PASSAGE	INSIDE TRIM*	DUMMY*	CASE QTY.
SATIN NICKEL 15	36-RD3810SN	36-RD3803SN	36-RD3805SN	36-RD3808SN__	36-RD3807SN__	20
CASE QTY. 20						

