

SPECIFICATIONS

- SOLID METAL CONSTRUCTION
- 4-IN-1 ADJUSTABLE LATCH FOR DRIVE-IN AND RADIUS MORTISE INSTALLATIONS WITH ADJUSTABLE BACKSET: 2-3/8" (60 mm) – 2-3/4" (70 mm)
- FITS STANDARD DOOR THICKNESS: 1-3/8" (35 mm) – 1-3/4" (45 mm)
- STANDARD BORE HOLES: 1-1/2" (38 mm) and 2-1/8" (54 mm)



GRADE
3

ANSI GRADE 3




LIFETIME WARRANTY



20 MINUTE
OPTIONAL
FIRE RATING

4-IN-1 DRIVE-IN / RADIUS MORTISE

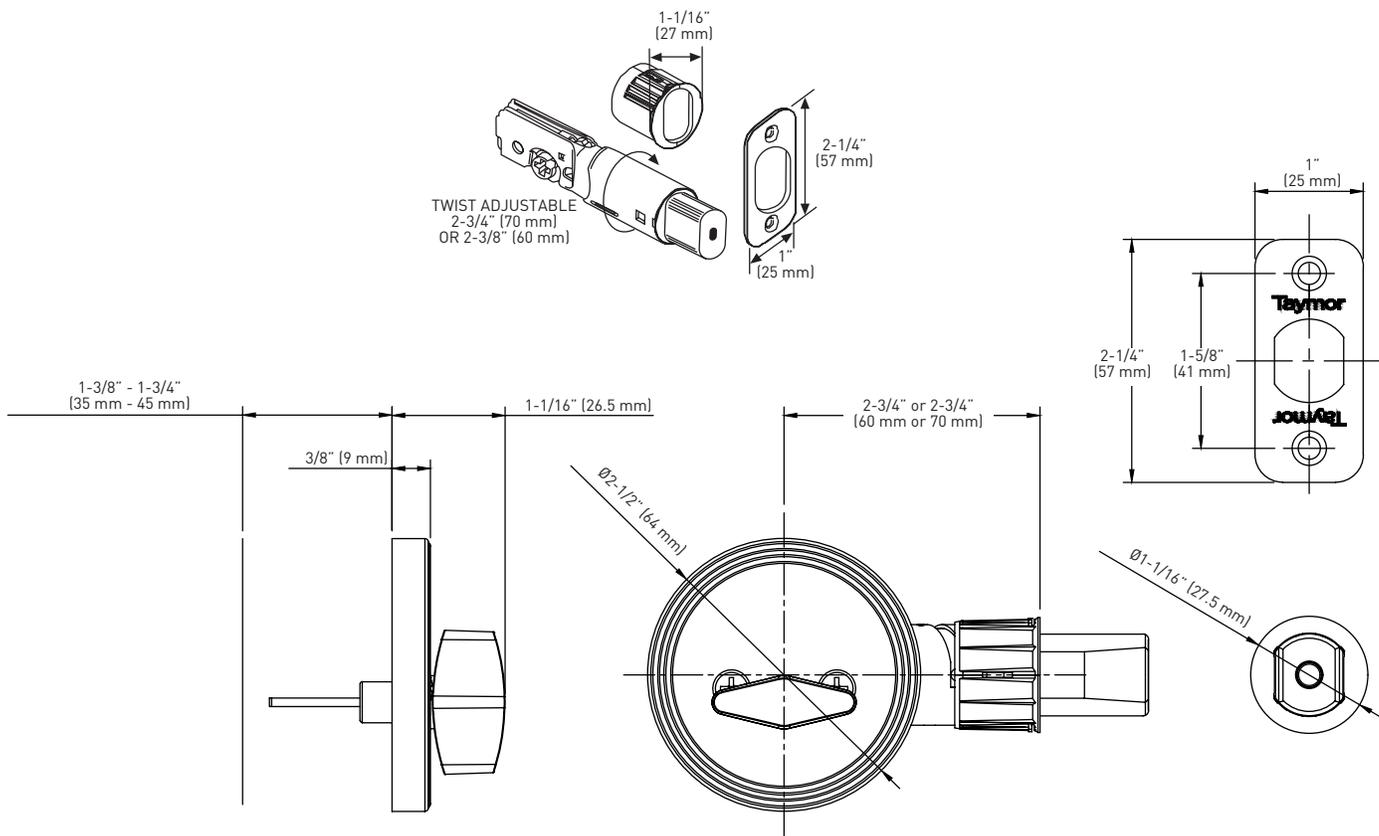

MEASUREMENTS SUBJECT TO A 3% VARIANCE

MEASUREMENTS ARE FOR REFERENCE ONLY. TAYMOR RESERVES THE RIGHT TO CHANGE THE PRODUCT SPECS WITHOUT NOTICE. FOR PRODUCT WARRANTY, PLEASE VISIT TAYMOR WEBSITE FOR DETAILS.

| BUILDER PACK | SINGLE SIDED INTERIOR THUMB TURN | CASE QTY. |
|------------------|----------------------------------|-----------|
| SATIN NICKEL 15 | 36-RD2100SN | 20 |
| MATTE BLACK 19 | 36-RD2100BLK | 20 |
| SATIN CHROME 26D | 36-RD2100SC | 20 |

